

PRVPATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

REC'D 26 MAR 2003

WIPO PCT

**Intyg
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande *Print Dreams Europe AB, Kista SE*
Applicant (s)

(21) Patentansökningsnummer *0200711-0*
Patent application number

(86) Ingivningsdatum *2002-03-11*
Date of filing

Stockholm, 2003-03-12

För Patent- och registreringsverket
For the Patent- and Registration Office

Lina Oljeqvist
Lina Oljeqvist

Avgift
Fee

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

Technical field

The present invention pertains to a hand-operated printing device having a print head assembly for a hand-held and hand-operated printing on a print medium controlled by a processor, and a method therefore, so called Random Movement Printing Technology (RMPT). Specifically it provides enhanced image quality for sectional printing of an image by means of a printing transition pattern.

Background art

Hand-held and hand-operated printing devices with an ink-jet print head are known through various documents.

US patent No. 5,927,872 by Yamada discloses a system and a method of printing an image represented by a frame of image data utilizing a hand-held printer having optical sensor means for tracking positions of the hand-held printer relative to the surface of a print medium during a printing process. It is monitored in real time using navigation information generated by the optical sensor.

Each optical sensor comprises an array of opto-electronic elements to capture images of the surface of a print medium at fixed time intervals. Preferably, the optical sensor means can detect slight pattern variations on the print medium, such as paper fibers or illumination pattern formed by highly reflective surface features and shadowed areas between raised surface features. These features can then be used as references for determining the position and the relative movement of the hand-held printer. During the printing process, the hand-held printer can also use the printed portions of the image as reference positions.

In the preferred embodiment, the hand-held printer contains a navigation processor and a printer driver. Using the printer driver, the navigation processor drives the hand-held printer to print segments of the image onto a print medium as the hand-held printer travels across the print medium during a printing process. Each segment of the image is printed onto a particular location on the print medium to form a composite of the image.

In the US patent No. 6,233,368 B1 by Badyal et al it is taught a CMOS digital integrated circuit (IC) chip on which an image is captured, digitized, and then processed on-chip in substantially the digital domain.

A preferred embodiment comprises imaging circuitry including a photo cell array for capturing an image and generating a representative analog signal, conversion circuitry including an n-bit successive approximation register (SAR) analog-to-digital converter for converting the analog signal to a corresponding digital signal, filter circuitry

including a spatial filter for edge and contrast enhancement of the corresponding image, compression circuitry for reducing the digital signal storage needs, correlation circuitry for processing the digital signal to generate a result surface on which a minima resides, representing a best fit image displacement between the captured image and previous images, interpolation circuitry for mapping the result surface into x- and y-coordinates, and an interface with a device using the chip, such as a hand-held scanner.

The filter circuitry, the compression circuitry, the correlation circuitry and the interpolation circuitry are all embodied in an on-chip digital signal processor (DSP). The DSP embodiment allows precise algorithmic processing of the digitized signal with almost infinite hold time, depending on storage capability. The corresponding mathematical computations are thus no longer subject to the vagaries of CMOS chip structure processing analog signals. Parameters may also be programmed into the DSP's software making the chip tunable, as well as flexible and adaptable for different applications.

US patent No. 5,644,139 by Allen et al discloses a scanning device and a method for forming a scanned electronic image including the use of navigation information that is acquired along with image data, and then rectifying the image data based upon the navigation and image information. The navigation information is obtained in frames. The differences between consecutive frames are detected and accumulated, and this accumulated displacement value is representative of a position of the scanning device relative to a reference. The image data is then positioned-tagged using the position data obtained from the accumulated displacement value. To avoid the accumulation of errors, the accumulated displacement value obtained from consecutive frames is updated by comparing a current frame with a much earlier frame stored in memory and using the resulting difference as the displacement from the earlier frame. These larger displacement steps are then accumulated to determine the relative position of the scanning device.

The above documents do only teach how to determine the position in a conceptual generation of navigation information. In this context the US patent 5,927,872 by Yamada uses the navigation information for a hand-held scanner disclosed in US patent 5,644,139 by Allen et al. The invention according to Allen et al teaches navigation through comparison of pixels on a frame basis.

A disadvantage with the current handheld printing devices originates from the inaccuracy of the printer-sensors providing positional information to the device as to its positioning on a printing medium. The type of position reading sensors currently utilized in such handheld and hand-operated printing devices have a deviation in accuracy for

positioning data of about 0,5-1%, consequentially reducing the quality of image printing since a positional divergence of that magnitude is enough for providing either an overlap or a gap between two subsequently printed sections of an image having sides interfacing each other. The complete image printed in sections utilizing printer-positional information as provided by such sensors will in some intersections therefore be either darkened due to overlapping in part of printed image sections or lightened due to a distancing between the same and the total image impression will thus be considerably impaired.

There is always the possibility that a hand-held printing device at occasions is positioned correctly for a subsequent sectional printout of an image, but this is achieved more by chance and not so much by exact positioning through sensor information.

Accordingly, the lack of predictability for printout quality cannot be satisfactory for the market, from which demands for maintenance of a certain homogenous and acceptable level of printout quality probably will be put forth as essential requisites for the efficacy and applicability of these devices. By analyzing the state of the art through the above documents and in view of the discussed problem, a need of providing a means for ensuring enhanced and homogenous quality-printing emerges, which should be accomplished preferably without interfering with the structural smallness of the hand-held printing devices as of current composition.

Summary of the disclosed invention

The present invention relates to a hand-operated printing device having a print head assembly for a hand-held and hand-operated printing on a print medium controlled by a processor and a method therefore. One aim of the present invention is to provide enhanced image quality for printouts accomplished by the assembly.

Hence, the present invention sets forth a hand-held and hand-operated random movement-printing device controlled by at least one processor, and having a print head assembly comprised in a housing. Thereby it comprises:

at least one position sensor means, sensing the position of the printing device on a print medium in relation to pixels to be printed;

a memory, storing at least one image with its mutual image pixel coordinate data;

a print-head array provided with nozzles, for printing image pixels onto the print medium in accordance with the pixel coordinate data during a printing sequence; wherein

the image being built-up through sectional printing whereby each section has at least one print area interfacing at least one other print area, said interfacing print areas being correlated to fill-out transition print areas during printing of said sections through at least one transition printing pattern by omitting printing of some pixels in said transition print area.

5 In one embodiment of the present invention, said omitted pixels in said transition area according to said printing pattern are randomly distributed.

One embodiment comprises that said omitted pixels in said transition area according to said printing pattern are distributed according to a mathematical algorithm.

10 Another embodiment comprises that said omitted pixels in said transition area are distributed according to a pre-stored printing pattern.

A further embodiment comprises that the probability of a pixel being printed within the transition area of an image section is decreasing towards that peripheral side of the transition area facing a side of an image section for subsequent printing.

15 A still further embodiment comprises that a pixel is printed within the transition area when both the image-pixel and the corresponding pixel of the transition pattern have a value TRUE for printing.

Yet another embodiment comprises that a pixel is omitted within the transition area when one of an image-pixel and the corresponding pixel of the transition pattern have a value FALSE for printing.

20 A yet further embodiment comprises that a variable range of the outermost positioned nozzles in the array are arranged to provide the transition pattern.

A still further embodiment comprises that the 5-20 outermost positioned nozzles at each end of the array are arranged to provide the transition pattern.

25 Yet one more embodiment comprises that the transition pattern provides a gradually decreasing probability of pixel printing the further out the nozzles are located at each end of the array.

Yet a further embodiment comprises that an earlier omitted pixel is printed during a re-printing sequence of the same image and an earlier printed pixel is not re-printed.

30 Yet an embodiment comprises that the print head is of the ink-jet type having nozzle channels, arranged for spraying ink droplets from an associated ink container onto the print medium in accordance with the pixel coordinate data.

Furthermore the present invention sets forth a method for a hand-held and hand-operated random movement-printing device controlled by at least one processor, and having a print head assembly comprised in a housing. It comprises the steps of:

sensing the printing device position on a print medium in relation to pixels to be printed;

storing at least one image with its mutual image pixel coordinate data in a memory;

5 printing image pixels through nozzles in a print-head array onto the print medium in accordance with the pixel coordinate data during a printing sequence; wherein the image being built-up through sectional printing whereby each section has at least one print area interfacing at least one other print area, said interfacing print areas being correlated to fill-out transition print areas during printing of said sections through at least one transition printing pattern by omitting printing of some pixels in said transition print area.

10 The method of the present invention is able to perform method steps of the above print device embodiments in accordance with attached method sub-claims.

Brief description of the drawings

15 Henceforth reference is had to the accompanying drawings for a better understanding of the given examples and embodiments of the present invention, wherein:

Fig. 1 illustrates a perspective view in section of a printing device that may be used in the present invention;

20 Fig. 2 illustrates a perspective view from underneath of a printing device according to Fig. 1;

Fig. 3 illustrates a schematic view of the main components of a printing device according to Fig. 1 and 2;

Fig. 4 illustrates a perspective view of another embodiment for a printing device that may be used in the present invention;

25 Fig. 5 illustrates a perspective view of a simpler printing device that may be used in the present invention;

Fig. 6 schematically illustrates a sensor/print-head assembly that may be used in the present invention;

30 Fig. 7 illustrates a diagram with parameters used to determine the position of a sensor that may be used in the present invention;

Fig. 8 illustrates a diagram with parameters for a print-head nozzle position;

Fig. 9 illustrates one embodiment of a transition pattern for image printing in sections with a handheld and hand operated printing device in accordance with the present invention.

Fig. 10 and 11 respectively shows the same image, printed in sections with and without using a transition pattern in accordance with the present invention.

Detailed description of preferred embodiments

5 The present invention relates to a handheld and hand operated printing device having a print head assembly and a method therefore, so called Random Movement Printing Technology (RMPT), for sectional printing of an image on a print medium. The printing device and method providing enhanced, homogeneous and to a certain degree predictable printout quality by means of a printing transition pattern utilized in the transition areas
10 between associated section-sides of the printed image. Thereby, a smoothening out of irregularities and discrepancies during printing, due to positional deviation regarding the positioning of the device on the print medium relating to non-exact sensor data to the device, can be achieved without compromising the structural composition of the printing device, i.e. without enlarging it, for example by providing better-quality sensors.

15 Fig. 1 to Fig 10 disclose or relate to a handheld printer device as described in the Swedish patent application 0102542-8 by Walling not yet published, which substitutes both the mechanical control of a print-head and forward feeding of a print-out through hand movements on a printing surface. This enables a manufacturing of a printer device, having less width than the actual printout, and a reduction of the total of mechanical components in
20 its construction.

It is designed to provide a compact portable printing device in order to enable a user to print from small portable devices such as a cellular phone, a portable PC, a personal digital assistance (PDA) or the like, and other portable electronic devices or for electronic stamping, printing of small texts, tags, addresses, cutting and clipping.

25 By fixing a print-head in a construction plate where one or more positioning sensor means are fixed as well, it is possible to obtain a geometrical construction with an x- and y- coordinate system and to establish, with great mathematical accuracy, the coordinates x and y for each individual ink-jet opening/nozzle in the print-head.

30 The coordinates, during a time frame, constitute the grounds for an accurate and precise spraying of ink-drops onto a printing surface according to a predetermined printing design. Even when the coordinates change over a time period, it is possible to calculate in real time, the changes in direction, speed, acceleration, rotation etc. along the z-axis controlled by a microprocessor. It provides the possibility to adjust the printing-head to spray an even and pre-programmed flow of ink-jet drops into an adjustable and varying flow of ink-jet drops.

Fig 1 and 2 illustrate a hand operated printing device composed by a construction/design body 1 and a print-head 2 which interact with one or more optical positioning sensor means 3, a micro controller circuit 4, a communication unit 5 to transmit the data, one or more command buttons 6 a control screen, and a source of energy, in this case a battery 8.

The embodiment according to Fig.1 and 2 illustrate the different components of a printing device fixed to a printed circuit card, which simultaneously functions as a construction surface where those components are fixed. An elevation in the construction secures that the lowest surface of the printing device does not touch the area where the ink has been previously applied provided that the printing device is removed from that area.

The printing process starts with a data file containing pre-selected printing patterns, which are sent via the communication unit 5 to a data memory, for example, one which is built into the micro controller circuit 4. With the assistance of a built-in positioning sensor means 13 and one of the command buttons 6 the coordinates are indicated to an outgoing point of reference in the printing surface. One or more sources of light, for example light emitting diodes (LED), lighting up the printing frame so that the optical positioning sensor means are activated and then the forward feeding of the coordinates to the micro controller circuit can take place.

When the positioning sensor means 3 and the print head 2 are fixed in relation to each other, a geometrical construction with all the necessary parameters for a mathematical calculation of the coordinates of the print head 2 can be achieved.

The micro controller circuit 4 contains a software program, which uses the incoming data from the positioning sensor means 3 and mathematical equations to calculate in real time the coordinates for each individual ink-jet nozzle 12.

Using the measures of two coordinates establishes the required movement direction for each case. The time difference between two measurements indicates the acceleration and speed required. Simultaneously all measurements and equations are compared with the stored printing commands based upon coordinates equated from the original data file.

At this stage the micro controller circuit has sufficient information to seize a decision. On a positive indication an electric impulse is generated in the piezo- or thermo-electrical micro pumps in the concerned ink-jet nozzles 12, which in turn sends out ink-jet drops onto the printing surface.

The printing commands are erased after each electric impulse so that even if the ink-jet nozzles coincide with the previous coordinates no ink drops are sent out to the existing print out.

Fig. 3 illustrates how the different components of the printing device interact as well as reproduction of the geometrical forms established between the ink-jet nozzles 12 and the positioning sensor means 3.

The embodiment according to Fig. 4 illustrates the printing device with a complementary digital camera 14, for example, such as a CCD equipped camera.

Fig. 5 illustrates another embodiment for printing of smaller text quantities or graphics.

This can be considered as an electronic labeling with a pre-programmed and/or programmable electronic stamp pad.

In this embodiment only one positioning sensor means 3 is used and accordingly a simpler micro controller circuit 4 is needed, since the printing device only makes smaller and relatively straight movements.

The sensor/print-head device consists of two position sensor means S0, S1 and a print head array 60 mounted together as Fig. 6 illustrates. Fig. 6 illustrates further, the two sensor means S0 and S1 in a fixed relation to a print-head array 60 with ink-jet nozzles. Ho depicts the distance from the array 60 to the sensor means S0, here Ho is the same distance to the sensor means S1. Ve and Vo, indicate the distance to the upper most and the lower nozzle in the array 60, respectively. The sensor means S0, S1 provide a signal corresponding to movements in x- and y-directions in a first coordinate system fixed to the respective sensor means S0, S1. The sensor means S0, S1 are fixed so that their coordinate systems are parallel to each other. Software keeps track of the assembly's position and angle relative to the paper coordinate system by integrating the movements given by the sensor means signals.

The new positions given the differential movements of sensor means S0, S1 are calculated as follows:

All position changes given in the sensor means coordinate system must be transformed to position and angle of the sensor system in a paper or other print medium coordinate system, here named as a second coordinate system. Since the distance, $2H_0$, between the two sensor-means is fixed it is enough to know the position of one sensor means and the angle of the print head array relative to the second coordinate system.

Illustrated in Fig. 7, is a movement or navigation of the sensor print-head assembly according to Fig. 6. The array 60 has been moved or navigated an angle alpha. The

upper most nozzle is depicted as Pnlast and the lower nozzle as Pnfirst, respectively, in Fig. 7. Also, the second coordinate system is depicted with the two longer arrow axis in Fig. 7.

In Fig. 7 at least one of the sensor means is assigned a first coordinate system, whereby one axis 62, preferably the x-axis, is directed through both sensor means S0, S1, and the other axis, preferably in a relation to the array 60, here in parallel to the array.

In Fig. 8, the same movement as in Fig. 7 is depicted, but without the array 60. The Fig. 8 further depicts a first coordinate system on the coordinate axis 60 directed through the both sensor means S0, S1. The first coordinate system, is in this embodiment duplicated, as indicated through the arrows on the axis 62, but as the distance between both sensor means S0, S1 is fixed only one of the first coordinate systems is needed for computation.

The movement of the sensor means S0 or S1 (it does not matter which one) in the paper or print medium second coordinate system at an angle 'alpha' is calculated, in accordance with the present invention, as:

$$\begin{aligned} \text{deltaX} &= \text{S0DiffX} * \cos(\alpha) - \text{S0DiffY} * \sin(\alpha) \\ \text{deltaY} &= \text{S0DiffX} * \sin(\alpha) + \text{S0DiffY} * \cos(\alpha) \end{aligned}$$

Where S0DiffX and S0DiffY are the movements of the sensor means in x- and y-directions respectively, in the sensor/print-head device, named first coordinate system.

The angular change can be calculated as the difference of the sensor means y-movements in the sensor means first coordinate system multiplied by a constant that is determined from the distance between the sensor means S0, S1. To simplify, the angle is measured in units of one sensor "step" and the sine and cosine values are taken from tables that are adjusted according to this. Thus S1DiffY - S0DiffY, provides the angle change.

The movement in x-direction of sensor means S1 is not used, the information is redundant since the sensor means geometry is fixed.

When the position of one sensor means S0 or S1 and the tilt angle of the sensor/print head assembly alpha are known the positions of the print head nozzles can be calculated as follows, depicted in Fig. 7:

The positions of the first and last nozzle are calculated as:

$$\begin{aligned} \text{PNfirstX} &= \text{S0x} + \text{Ho} * \cos(\alpha) - \text{Vo} * \sin(\alpha) \\ \text{PNfirstY} &= \text{S0y} + \text{Ho} * \sin(\alpha) + \text{Vo} * \cos(\alpha) \\ \text{PNlastX} &= \text{S0x} + \text{Ho} * \cos(\alpha) - \text{Ve} * \sin(\alpha) \\ \text{PNlastY} &= \text{S0y} + \text{Ho} * \sin(\alpha) + \text{Ve} * \cos(\alpha) \end{aligned}$$

To calculate the positions of all nozzles, it is to start with the first nozzle positions and adding up the difference in x- and y-directions between the nozzles, calculated by dividing the x- and y-distance between the first and last nozzle by the number of nozzles:

$$PN(n)X = PNfirstX + n * \text{delta}X$$

$$5 \quad PN(n)Y = PNlast + n * \text{delta}Y$$

where

$$\text{delta}X = PNlastX - PNfirstX$$

$$\text{delta}Y = PNlastY - PnfirstY$$

10 In accordance with the teaching it sets forth a sensor and ink-jet print-head 2 assembly comprised in a housing 1 for a hand-held and hand-operated printing device controlled by a processor 4. It thus comprises:

two position sensor means S0, S1 at least one sensor means being related to a first coordinate system, having one axis in a relation to the print-head assembly, and one axis 62 in a direction through both sensor means;

15 a print-head array 60 attached in a fixed position to the sensor means S0, S1; input means 6 on the housing connected to the processor for input of control commands;

determining means for reference coordinates in a second coordinate system provided in relation to a print medium, the reference coordinates being established by a control command through the input means 6 with the thus read sensor means signals;

20 integrating means for keeping track of the assemblies position related to the reference coordinates in the second coordinate system by integrating displacement of the sensor means position in the first coordinate system;

25 computing means for transforming the sensor means S0, S1 coordinates to coordinates in the second coordinate system, whereby the assemblies position on the print medium is determined in relation to the reference coordinates.

Sensor means and print-heads that are suitable for the present invention are well known in the art and described in for example US patent 5,927,872 by Yamada, US patent 6,233,368 B1 by Badyal et al, and US patent 5,644,139 by Allen et al. Sensor means can be 30 bought from Agilent, www.agilent.com. Another sensor means has the product name HDNS-2000 and enables 1.500 pitures/s, the next model in progress enables 6.000 pictures/s. Sensor means in this description can comprise known means that are to cooperate together with a sensor itself, for example, LED's or only be sensors or an array of sensors.

The type of position reading sensors currently utilized in known handheld and hand-operated printing devices generally have a deviation in accuracy for positioning data of about 0,5-1%, which considerably reduces the print-out quality and the visual experience of a printed image. The human eye easily detects a gradually increasing as well as decreasing blackness in a printed image and a positional divergence of the printing device of about 0,5-1%, is clearly enough for providing either an overlap or a gap between two subsequently printed sections of an image having sides interfacing each other. The complete image, printed in sections utilizing printer-positional information as provided by the currently utilized sensors, will in some intersections therefore be either darkened due to overlapping in part of subsequently printed image sections or lightened due to a distancing between the same.

At occasions, the hand-held printing device will be positioned correctly for a subsequent sectional printout of an image, but this will be accomplished more by chance and not so much by accurate positioning by means of sensor data. The random and unpredictable printout quality achieved is a great setback with the former printer solutions and a need for a better product evidently emerges, preferably without interfering with the structural smallness of the hand-held printing devices as of current composition.

For printing an image in sections with a handheld and hand operated printing device (1) controlled by a processor (4), in one embodiment of the invention provided with an ink-jet print head array (2) having nozzles 12 and achieving an improved and homogeneous image-printout quality, a software solution is therefore implemented in accordance with the present invention, which in one embodiment provides a printing pattern in a transition area between associated image section sides interfacing each other during a printing sequence, when the full image is printed in subsequent sections.

A transition pattern can in one embodiment of the present invention be provided through a variable range of the outermost placed nozzle channels 12 at each end of the print head array 60 during printing in accordance to transition pixel printing instructions provided via printer-inherent software. The pixels, which are to be printed onto the print medium according to the stored pixel data through the remaining nozzle channels 12 of the array 60, are consequently printed thereon at positions corresponding to their mutually stored pixel positional coordinate data.

During a printing sequence, the printer device is swept, preferably from the left to the right and back to the left and so forth forming a meandering movement of the device in a downward direction on the print medium for sequentially building up a full printout of an image. Image pixels are then, in a preferred embodiment of the invention, provided as ink

droplets from an ink container, printed onto the medium through for example a total of 128 nozzle channels 12 on the print head array 60 at positions thereon in accordance to previously stored image pixel coordinate data with exceptions for the respective selected number of the most distal channels on the array, omitting some of the pixels in accordance to a certain pattern for forming a visually smoothened transition area between subsequently printed image sections having interfacing sides. The 128 nozzle channels 12, in one embodiment of the invention, form a single pixel column extending in the vertical direction on the medium during printing of an image section and the pixels lying in the line of the print head array 60 are continuously selected from the memory for printing during such a sequence. The software, then through the transition pattern, which for example can be pre-stored, randomly generated or generated according to a mathematical algorithm, also controls the printing or omitting of pixels through the selected number of outermost positioned channels at each end of the print head array. The pixels are consequently only printed onto the medium through the said distal channels when both the selected memory-stored image-pixel and the corresponding pixel as of the transition pattern are present i.e. when both the corresponding pixels have a value TRUE for printing. In cases where either of the transition pattern or stored image-pixel is missing, that pixel is omitted during that printing sequence. An earlier printed pixel will not be printed again, but an earlier omitted pixel has further chances of being printed if and when the array of nozzle channels on the device is repeatedly swept across the location of such an omitted pixel on the print medium. Such a repeated sweeping of the printer can be performed for the sake of improving the pixel density of the printed image and earlier omitted pixels in transition areas can then be printed in accordance with their respective pixel coordinate data retrieved from storage in the memory. The previously printed pixels, which together form the essentially complete printout of the image, are then, in one embodiment of the invention, omitted from re-printing as their respective coordinate data are deleted from memory during their respective initial printing and that coordinate data can therefore not be referred to again for printing.

Alternatively, stored pixels, i.e. pixel data, are moved from a first memory place to a second memory place after being used in a printing sequence, for user-controlled retrieval to the first memory space again for repeated printing of the full image later.

Fig. 9, according to one embodiment of the present invention, illustrates a pre-stored transition-printing pattern generated by the 15 outermost positioned nozzle channels 12 of the print head array 60 and is intended to appear randomly generated. The probability for printing a pixel according to this transition pattern as of columns n to $n+15$ decreases in each

column towards the lower end thereof. In the uppermost row of pixels the probability for printing a pixel is 15/16 and the number of pixels for printing decreases linearly to a probability of 1/16 for pixel printing at the lowermost end, which represents the side interfacing a subsequent section for printing. Each of the columns n to $n+15$, according to the pattern, has a total of 7 or 8 pixels for printing and has a printing pattern differing from the other columns in that range. In column n , for example pixels 1-5, 7, 9 and 11, counting from the lowermost side of the column, cannot be printed and in column $n+1$, pixels 1-4, 6, 8, 10 and 13 cannot be printed according to the pattern. The transition pattern is then circularly repeated starting from column $n+16$, having an identical printing pattern as that of column n .

During a printing sequence, all pixels in a single or multiple transition pattern column, for example column n or columns n and $n+1$, are printed simultaneously given that the requisites for pixel printing are fulfilled, as being part of a total of 128 pixels for printing simultaneously by the single or multiple row nozzle channels 12 of the print head array 60.

Fig. 10 and 11 respectively show two printouts of the same image, both printed in sections with a handheld and hand-operated printer. Fig. 10 depicts the image printed without using a transition pattern and interfacing image section sides of the printout then suffering from poor quality in the transition areas. Fig. 11 depicts the image printed utilizing a transition pattern in accordance with the present invention and the transition areas between subsequently printed image sections are then hardly discernible, the transition pattern thus allowing for a high quality printing with such handheld and hand-operated printers despite positional deviation of the device on the printing medium due to inaccurate data from the printer sensors during a printing sequence.

In one embodiment of the present invention, the 5-20 outermost positioned nozzle channels at each end of the array are arranged to provide the transition pattern.

In another embodiment of the present invention, a pixel is omitted from printing within the transition area when one of an memory-stored image-pixel and the corresponding pixel as of the transition pattern have a value FALSE for printing, i.e. when only one of the selected memory-stored image-pixel and the corresponding pixel as of the transition pattern are present.

In embodiments of the present invention, an ink-jet print head with an associated ink container has been mentioned. However, the invention should not be limited to ink-jet print heads only, on the contrary, the principle described could be applicable on other types of print heads as well.

It is appreciated that the means used in the present invention are hardware means or software means or a combination of both.

The present invention is not restricted to given embodiments or examples, but the attached set of claims define other embodiments for a person skilled in the art.

5

0
1
2
3
4
5
6
7
8
9

Claims

1. A hand-held and hand-operated random movement-printing device controlled by at least one processor (4), and having a print head (2) assembly comprised in a housing (1), further comprising:
 - 5 at least one position sensor means (3), sensing the position of the printing device on a print medium in relation to pixels to be printed;
 - a memory, storing at least one image with its mutual image pixel coordinate data;
 - a print-head array (60) provided with nozzles (12), for printing image pixels onto
 - 10 the print medium in accordance with the pixel coordinate data during a printing sequence; wherein
 - the image being built-up through sectional printing whereby each section has at least one print area interfacing at least one other print area, said interfacing print areas being correlated to fill-out transition print areas during printing of said sections through at least one
 - 15 transition printing pattern by omitting printing of some pixels in said transition print area.
2. A printing device according to claim 1, wherein said omitted pixels in said transition area according to said printing pattern are randomly distributed.
3. A printing device according to claim 1, wherein said omitted pixels in said transition area according to said printing pattern are distributed according to a mathematical
- 20 algorithm.
4. A printing device according to claim 1, wherein said omitted pixels in said transition area are distributed according to a pre-stored printing pattern.
5. A printing device according to one of claims 1-4, wherein the probability of a pixel being printed within the transition area of an image section is decreasing towards that
- 25 peripheral side of the transition area facing a side of an image section for subsequent printing.
6. A printing device according to one of claims 1-5, wherein a pixel is printed within the transition area when both the image-pixel and the corresponding pixel of the transition pattern have a value TRUE for printing.
7. A printing device according to one of claims 1-6, wherein a pixel is omitted
- 30 within the transition area when one of an image-pixel and the corresponding pixel of the transition pattern have a value FALSE for printing.
8. A printing device according to one of claims 1-7, wherein a variable range of the outermost positioned nozzles in the array are arranged to provide the transition pattern.

9. A printing device according to one of claims 1-8, wherein the 5-20 outermost positioned nozzles at each end of the array are arranged to provide the transition pattern.

10. A printing device according to one of claims 1-9, wherein the transition pattern provides a gradually decreasing probability of pixel printing the further out the nozzles are located at each end of the array.

11. A printing device according to one of claims 1-10, wherein an earlier omitted pixel is printed during a re-printing sequence of the same image and an earlier printed pixel is omitted from re-printing.

12. A printing device according to one of claims 1-11, wherein the print head is of the ink-jet type having nozzle channels, arranged for spraying ink droplets from an associated ink container onto the print medium in accordance with the pixel coordinate data.

13. A method for a hand-held and hand-operated random movement-printing device controlled by at least one processor (4), and having a print head (2) assembly comprised in a housing (1), comprising the steps of:

15 sensing the printing device position on a print medium in relation to pixels to be printed;

 storing at least one image with its mutual image pixel coordinate data in a memory;

20 printing image pixels through nozzles (12) in a print-head array (60) onto the print medium in accordance with the pixel coordinate data during a printing sequence; wherein

 the image being built-up through sectional printing whereby each section has at least one print area interfacing at least one other print area, said interfacing print areas being correlated to fill-out transition print areas during printing of said sections through at least one transition printing pattern by omitting printing of some pixels in said transition print area.

25 14. A method according to claim 13, wherein said omitted pixels in said transition area according to said printing pattern are randomly distributed.

30 15. A method according to claim 14, wherein said omitted pixels in said transition area according to said printing pattern are distributed according to a mathematical algorithm.

 16. A method according to claim 15, wherein said omitted pixels in said transition area are distributed according to a pre-stored printing pattern.

17. A method according to one of claims 13-16, wherein the probability of a pixel being printed within the transition area of an image section is decreasing towards that peripheral side of the transition area facing a side of an image section for subsequent printing.

5 18. A method according to one of claims 13-17, wherein a pixel is printed within the transition area when both the image-pixel and the corresponding pixel of the transition pattern have a value TRUE for printing.

19. A method according to one of claims 13-18, wherein a pixel is omitted within the transition area when one of an image-pixel and the corresponding pixel of the transition pattern have a value FALSE for printing.

10 20. A method according to one of claims 13-19, wherein a variable range of the outermost positioned nozzles in the array provide the transition pattern.

21. A method according to one of claims 13-20, wherein the 5-20 outermost positioned nozzles at each end of the array provide the transition pattern.

15 22. A method according to one of claims 13-21, wherein the transition pattern provides a gradually decreasing probability of pixel printing the further out the nozzles are located at each end of the array.

23. A method according to one of claims 13-22, wherein an earlier omitted pixel is printed during a re-printing sequence of the same image and an earlier printed pixel is omitted from re-printing.

20 24. A method according to one of claims 13-23, wherein the print head is of the ink-jet type having nozzle channels, for spraying ink droplets from an associated ink container onto the print medium in accordance with the pixel coordinate data.

9
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130

Abstract

The invention relates to a hand-held and hand-operated printing device having a print head (2) assembly comprised in a housing (1) for a hand-held and hand-operated printing controlled by a processor (4), and a method therefore. The position of the printing device on a print medium is sensed in relation to pixels to be printed. An image is stored in a memory together with its mutual image pixel coordinate data. Image pixels are printed onto the print medium through nozzles (12) in a print-head array (60) in accordance with the pixel coordinate data during a printing sequence. The image is built-up through sectional printing whereby each section has at least one print area interfacing at least one other print area, said interfacing print areas being correlated to fill-out transition print areas during printing of said sections through at least one transition printing pattern by omitting printing of some pixels in said transition print area.

(Fig. 11)

Fig. 1

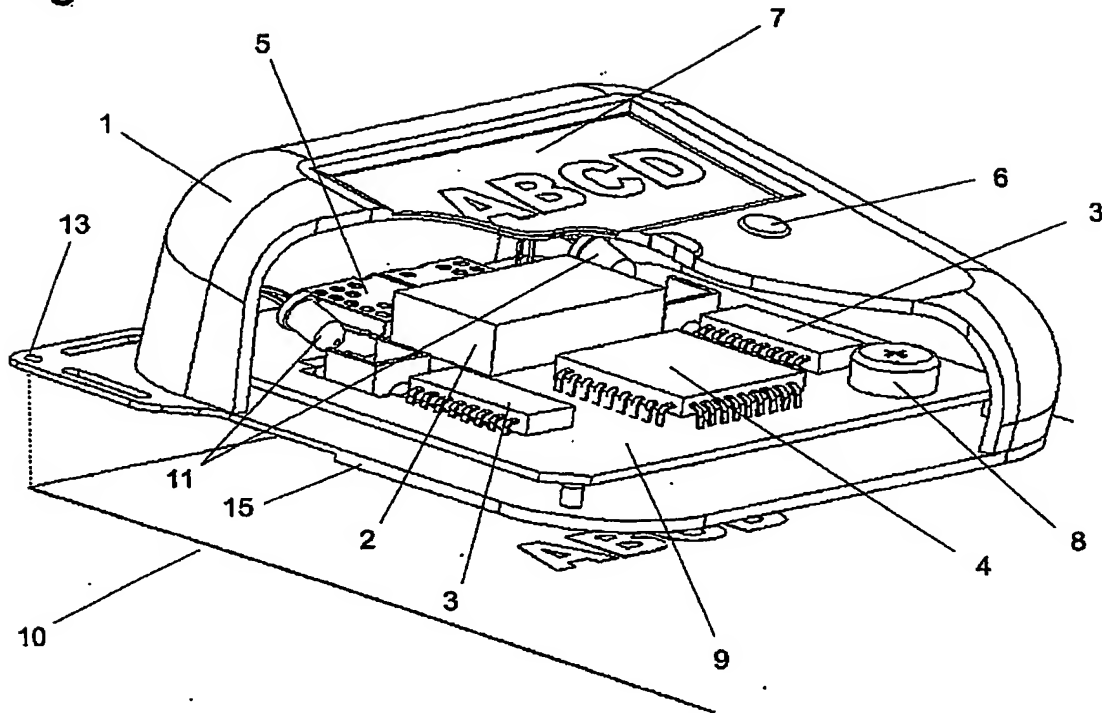


Fig. 2

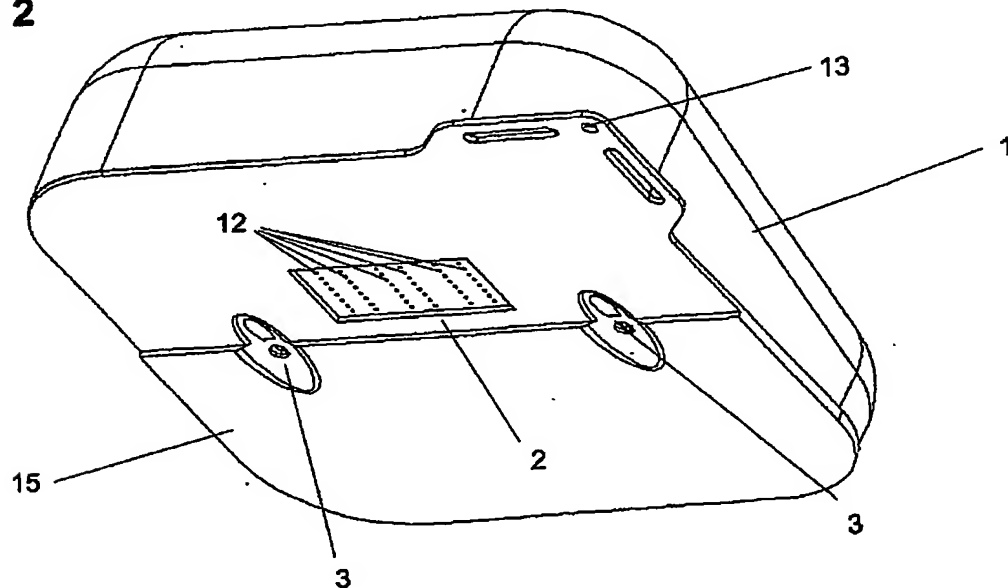


Fig. 3

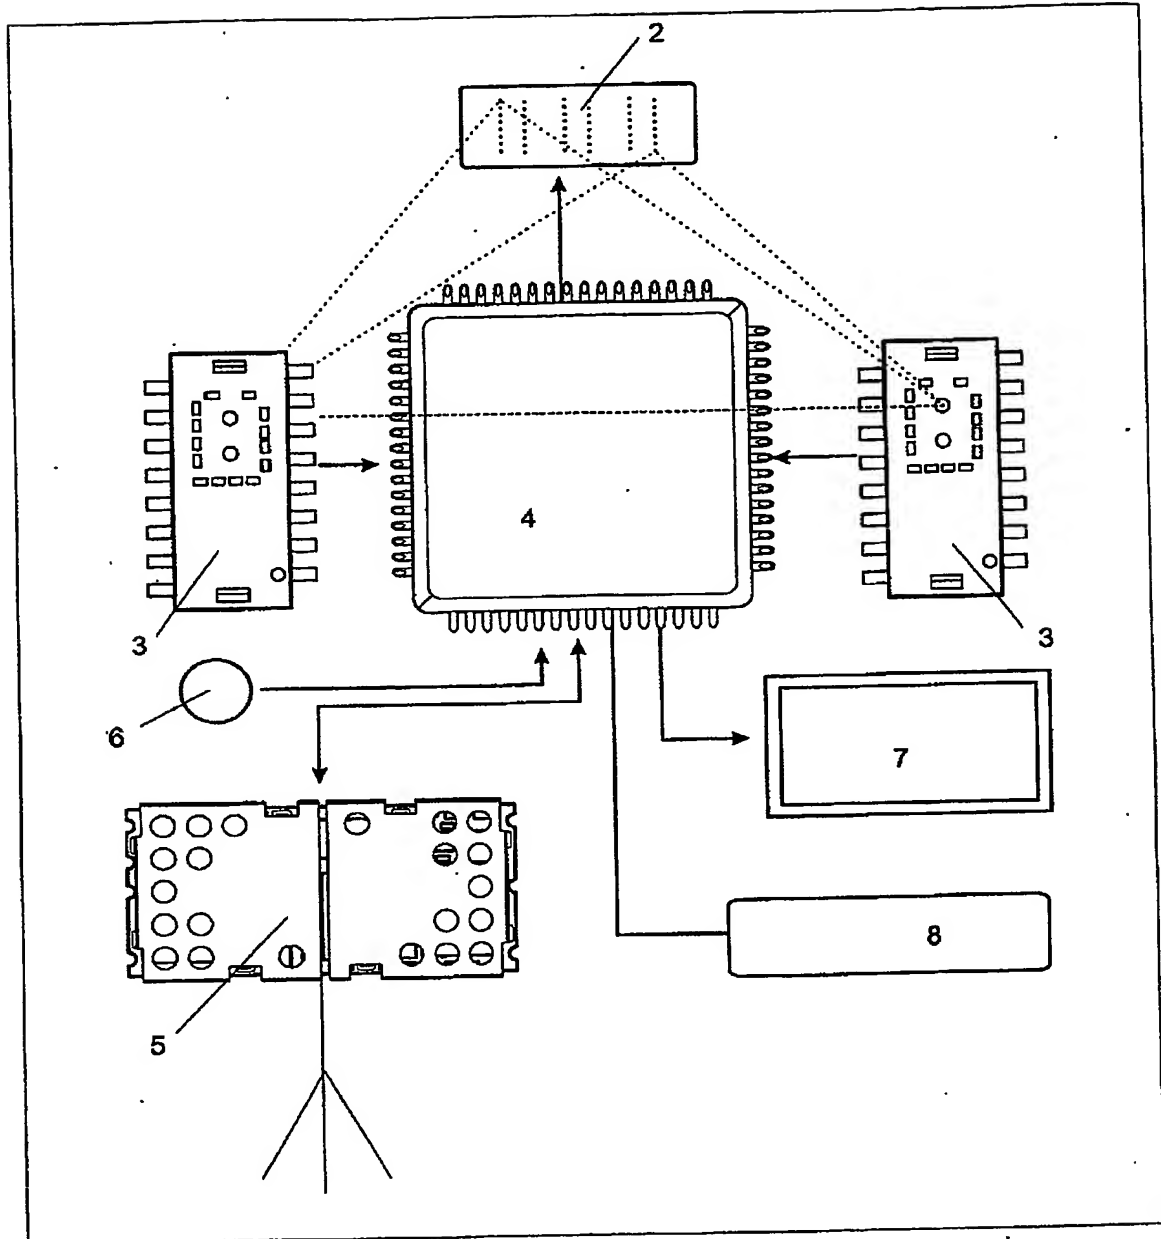


Fig. 4

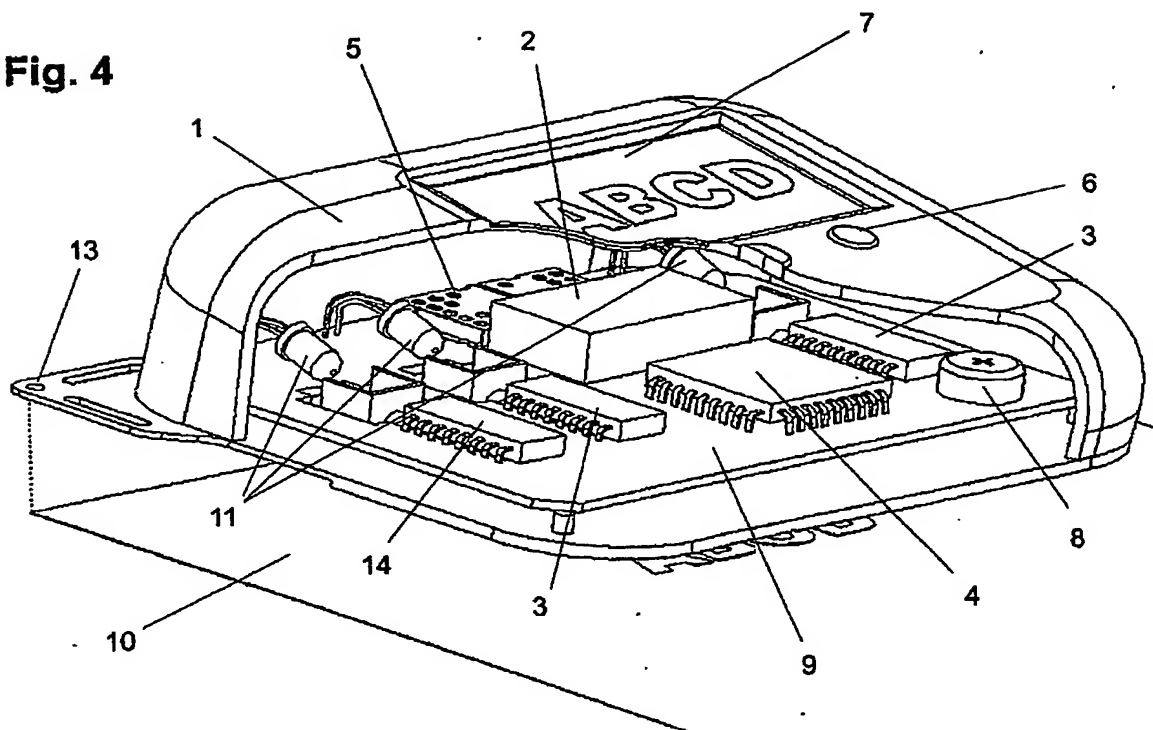


Fig. 5

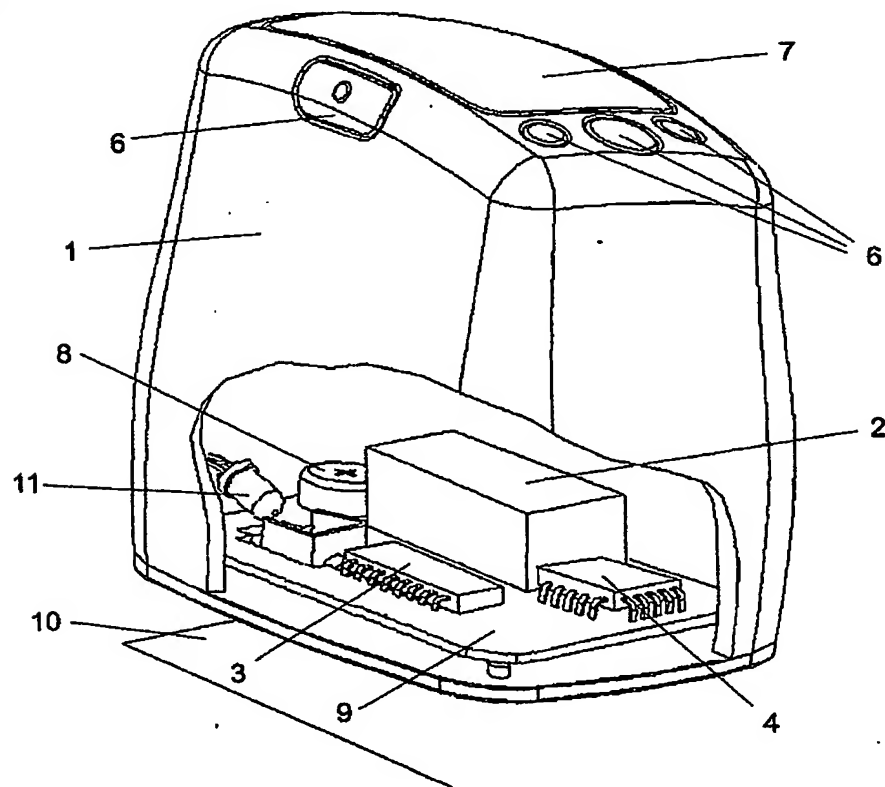


Fig. 6

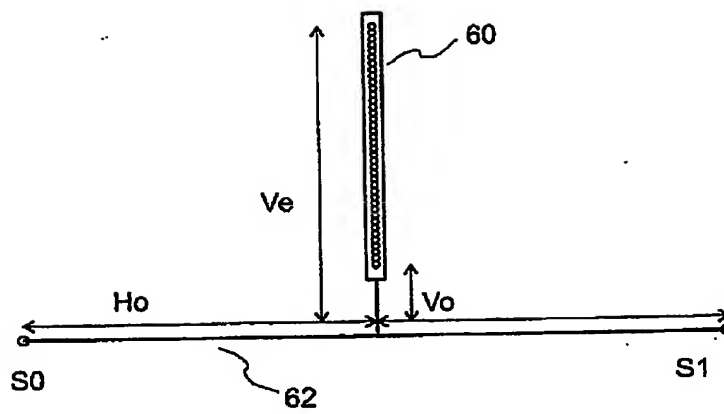


Fig. 7

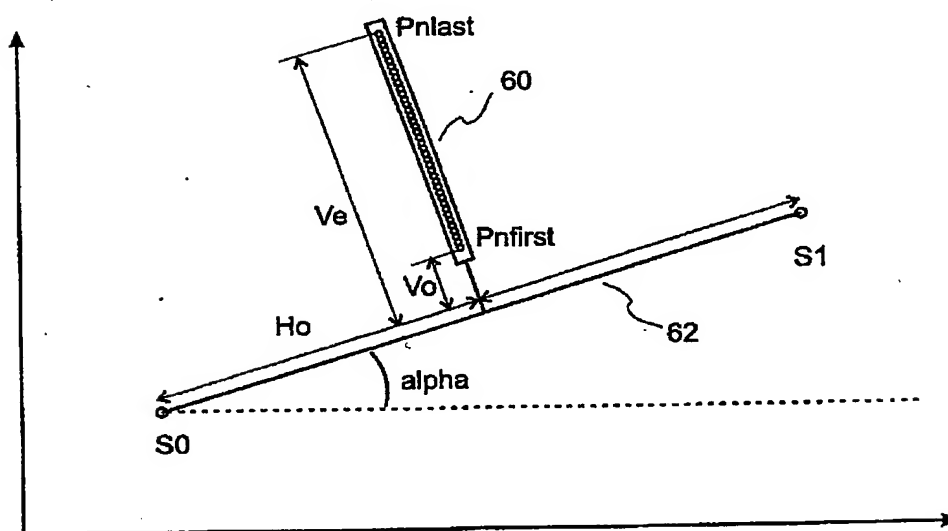
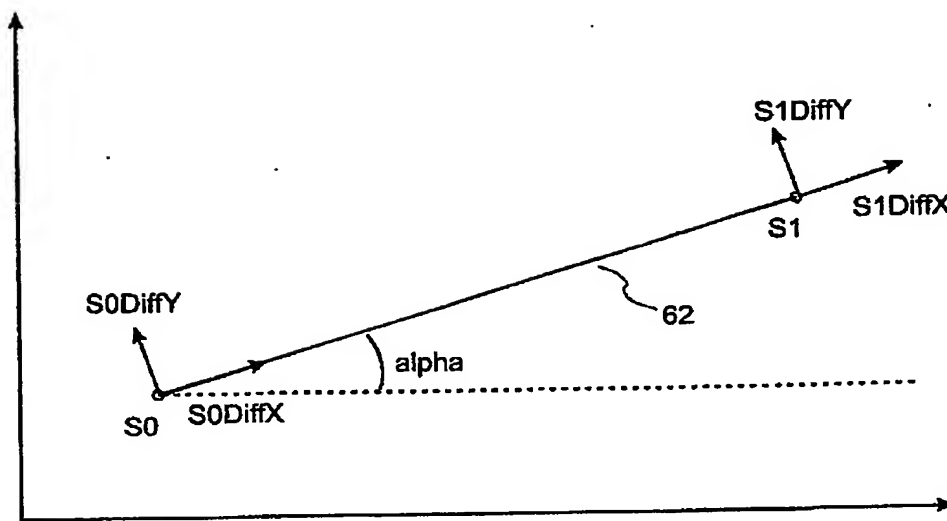


Fig. 8



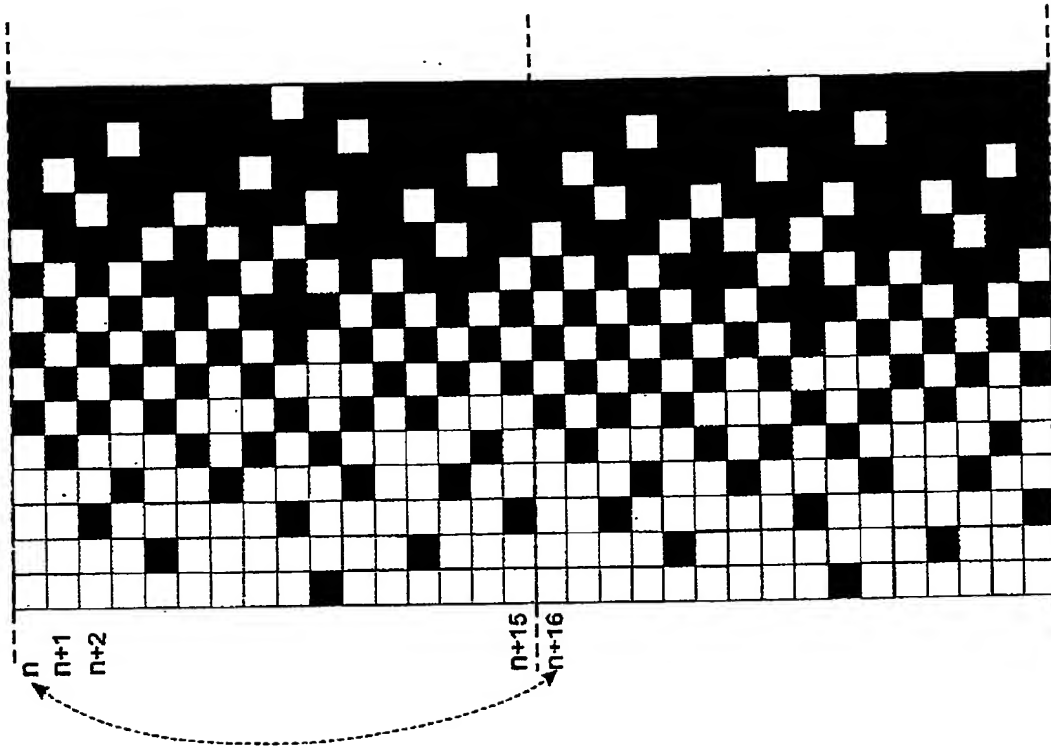


Fig. 9



Fig. 10

9-17-2008



Fig. 11

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.